



DETAIL AND SUBMITTAL SHEET

DISTRIBUTOR: \_\_\_\_\_ CONTRACTOR: \_\_\_\_\_

MODEL NUMBER: \_\_\_\_\_ PROJECT: \_\_\_\_\_

QUANTITY: \_\_\_\_\_ APPROVED BY: \_\_\_\_\_

ARCHITECT: \_\_\_\_\_ DATE: \_\_\_\_\_

JL INDUSTRIES  
INCORPORATED


4450 W. 78th Street Circle  
Bloomington, MN 55435  
Phone: 952-835-6850  
FAX: 952-835-2218

JL WEST COAST 6285 RANDOLPH STREET, COMMERCE, CA 90040 PHONE: 323-726-9070 FAX: 323-726-9068  
JL SOUTH EAST 5758 CORPORATION CIRCLE, FT. MEYERS, FL PHONE: 941-693-7500 FAX: 941-693-7501

**MULTI PURPOSE FLUSH ACCESS PANELS**

**MODEL TM FOR MASONRY, TILE AND WALLBOARD**

This all-purpose 14 gauge steel access door affords fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. The TM is primarily used for new installations or remodeling on masonry, tile, wood or other wall surfaces. The exposed 1" frame flange adds rigidity and conceals rough wall openings. The concealed hinged door is mounted to the frame and swings open for ease in servicing and results in a door always closing square in place. The unit is secured with screwdriver-operated cam locks, and a key-operated cylinder lock can be furnished in place of one cam lock. Nails, bolts or masonry anchors may be used to fasten the TM model securely in place.



OPTIONAL CYLINDER LOCK

**MODEL TMS-STAINLESS STEEL ACCESS PANEL**

This J.L. access panel is of the same high quality design as the Model TM, except that it is made of stainless steel #4 satin finish. The TMS meets the requirements of hospitals, restaurants and other high traffic areas where appearance, durability and extra resistance to impact and corrosion are the prime concerns. The TMS is fabricated for use in masonry, plastered and drywall surfaces. Flush mounted screwdriver latches are standard and key operated locks are available.

**SPECIFICATIONS:**

**Materials TM**

Door: 14 gauge steel  
Frame: 16 gauge steel with 1" flange  
Finish: Phosphate-dipped steel with prime coat.

**Materials TMS**

Door: 18 gauge stainless steel  
Frame: 18 gauge stainless steel with 1" flange  
Finish: #4 satin finish stainless steel

**Lock**

- \_\_\_ Flush screwdriver-operated steel cam standard.
- \_\_\_ Cylinder lock (with 2 keys) is available in place of one cam lock (at extra charge). Lock is key-coordinated to fit J.L. Fire Extinguisher cabinet as well. Also available hex head cam.

**Packaging**


One panel per carton

**Options**

- \_\_\_ TMS with 14 ga. door
  - \_\_\_ Louvered access panels
  - \_\_\_ Model SMT surface-mounted access panel
- Contact factory for details

**MODEL TM AND TMS TOP VIEW**

REFER TO TABLE

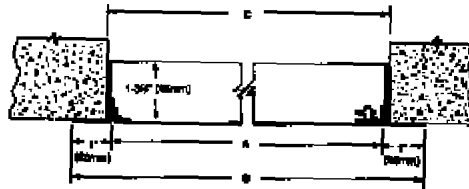

MODEL TM



MODEL TMS

**DOOR SIZES AND WALL/CEILING OPENINGS: MODELS TM AND TMS**

• DIMENSIONS IN INCHES • WEIGHT IN POUNDS						
A - MODEL SIZE WIDTH X HEIGHT	B - OUTSIDE FRAME DIMENSIONS		C - WALL OPENING DIMENSIONS		SHIPPING WEIGHT	LATCHES
	WIDTH	HEIGHT	WIDTH	HEIGHT		
___ 6" x 6"	8"	8"	6 3/8"	6 3/8"	4	1
___ 8" x 8"	10"	10"	8 3/8"	8 3/8"	4	1
___ 8" x 12"	10"	14"	8 3/8"	12 3/8"	6	1
___ 10" x 10"	12"	12"	10 3/8"	10 3/8"	6	1
___ 12" x 12"	14"	14"	12 3/8"	12 3/8"	7	1
___ 12" x 16"	14"	18"	12 3/8"	16 3/8"	9	1
___ 12" x 18"	14"	20"	12 3/8"	18 3/8"	10	1
___ 12" x 24"	14"	26"	12 3/8"	24 3/8"	12	2
___ 14" x 14"	16"	16"	14 3/8"	14 3/8"	9	1
___ 16" x 16"	18"	18"	16 3/8"	16 3/8"	11	1
___ 16" x 20"	18"	22"	16 3/8"	20 3/8"	13	1
___ 18" x 18"	20"	20"	18 3/8"	18 3/8"	12	1
___ 20" x 24"	22"	26"	20 3/8"	24 3/8"	15	2
___ 20" x 30"	22"	32"	20 3/8"	30 3/8"	20	4
___ 22" x 22"	24"	24"	22 3/8"	22 3/8"	17	4
___ 22" x 30"	24"	32"	22 3/8"	30 3/8"	22	4
___ 22" x 36"	24"	38"	22 3/8"	36 3/8"	24	5
___ 24" x 24"	26"	26"	24 3/8"	24 3/8"	18	4
___ 24" x 30"	26"	32"	24 3/8"	30 3/8"	22	5
___ 24" x 36"	26"	38"	24 3/8"	36 3/8"	25	5
___ 30" x 30"	32"	32"	30 3/8"	30 3/8"	30	5
___ 36" x 36"	38"	38"	36 3/8"	36 3/8"	41	5
___ X _____	_____	_____	_____	_____		

SPECIAL SIZES AND SPECIAL MODIFICATIONS CAN BE FABRICATED ON REQUEST.

For information on security access panels: See J.L. Industries Detention Specialties, Sweet's 11190/JLI or call factory.