


SUBMITTAL: ALUMINUM ROOF HATCHES (RHA)

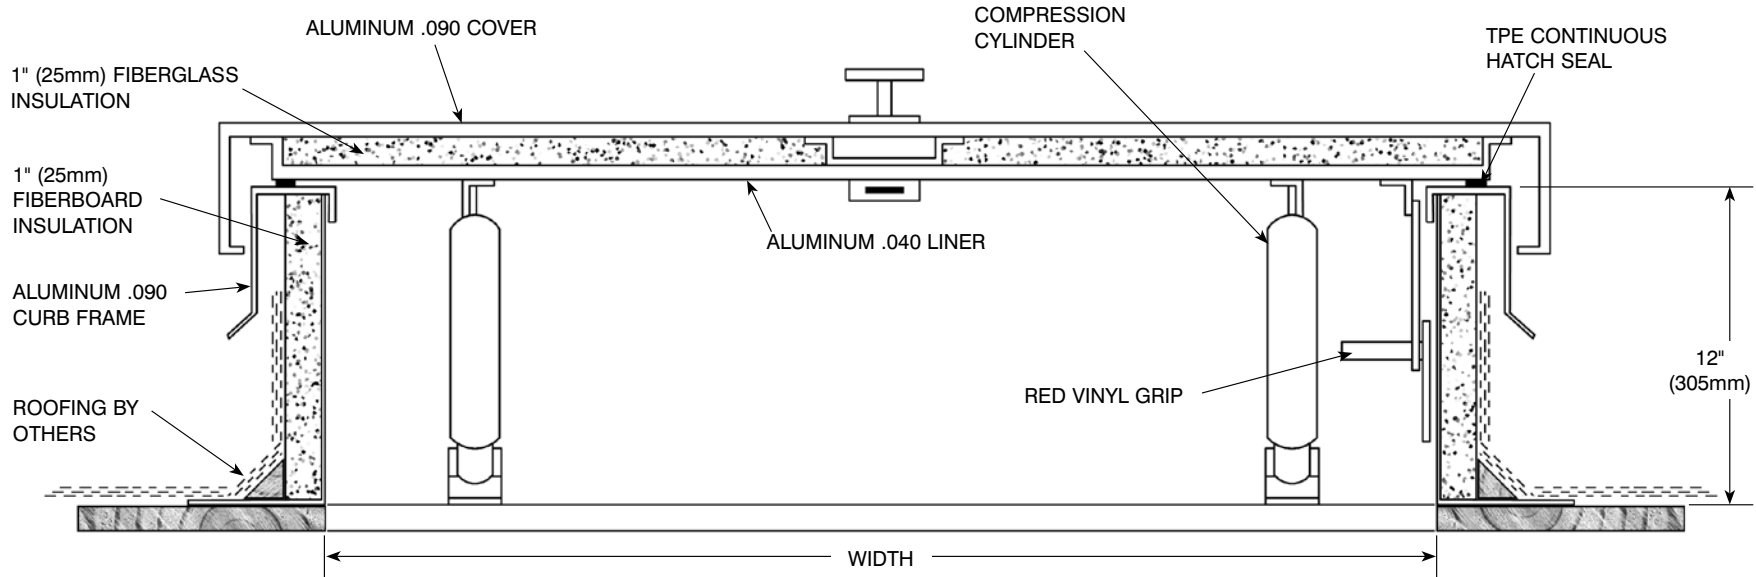

MODEL RHA SERIES

The Model RHA Series roof hatches provide for normal ladder, step ladder and stair access to roof from interior of the building. Manufactured from aluminum with weather resistant gasketing, these units feature long life, low maintenance and ease of operation. J.L. offers fully welded, mitered corners and box type door design. Units install easily over roof opening and are secured from base flange to roof deck.

DIMENSIONS IN INCHES

QTY	MODEL	CURB OPENING		SHIPPING WEIGHT
		Width	Length	
	RHA-1	2' 6"	3' 0"	91
	RHA-2	4' 6"	2' 6"	115
	RHA-3	8' 0"	2' 6"	190
	RHA-4	3' 0"	3' 0"	110
	RHA-5	4' 0"	4' 0"	160

SPECIFICATIONS

Furnish and install as indicated Model RHA aluminum roof hatch by J.L. Industries.

MATERIALS

Curb: .090" aluminum. 12" high curb with 4" wide flange including holes for securing to roof deck. (Curb includes integral counter flashing)

Cover: .090" aluminum, with .040" aluminum liner..

Finish: Mill finish aluminum.

Door Seal: TPE continuous hatch seal.

Insulation: 1" fiberboard insulation surrounding base. 1" fiberglass insulation between exterior door and liner.

Hinges: Heavy duty hinge with zinc pin.

Linkage: Heavy gauge automatic hold open arm with red vinyl grip for opening and closing.

Closure: Compression operated, shock absorbing cylinder.

Latch: Exterior handle, inside locking handle with interior and exterior padlock hasp.

Options: Ladder post Model LP-4 Safety yellow painted steel or Ladder post Model LP-5 galvanized steel.



JL INDUSTRIES

A Division of

ACTIVAR
INC.

www.activarcpg.com

Construction Products Group

Distributor:

Contractor:

Model Number:

Project:

Quantity:

Approved By:

Architect:

Date:

HEADQUARTERS: 4450 WEST 78TH ST. CIRCLE, BLOOMINGTON, MN 55435-5416 • PH: 800-554-6077 • FAX: 952-835-2218 • E-MAIL: JL@JLINDUSTRIES.COM • WWW.ACTIVARCPG.COM
 ACPG WEST COAST (SAMSON PRODUCTS): COMMERCE, CA PH: 800-228-9489 FAX: 323-726-9068 • ACPG SOUTHEAST (THOMAS ENTERPRISES): FT. MEYERS, FL • PH: 239-693-7500 FAX: 239-693-7501